SPACECOM
CCTV LENSES

TEZ6565RAI

[SPECIFICATIONS]

Image Size: 1/3 1/4

Focal Length :	6.5 - 65mm
Maximum Relative Aperture :	1:1.4
Iris :	F1.4 - Approx. 360 (With ND Spot Filter)
Zoom Ratio :	10X
Sensitivity Adjustment :	0.5 - 1.0Vp-p(Image Signal)
Angular Field of View :	40.5 X31.0 deg. at 6.5mm 4.2 X 3.2 deg. at 65mm
Image Format :	4.8X3.6mm(D6mm)
Minimum Object Distance :	1.2m(From Front Vertex)
Object Dimensions at M.O.D. :	84.2X63.3cm at 6.5mm 8.4X 6.4cm at 65mm
Optical Back Focal Distance :	9.85mm(In Air)
Flange Back :	12.5mm
Input Signal :	Composite Video Signal or Video Signal

Photometry Range :		Approx. 40% - 70% Variable to Vp-p
Input Impedance :		High Impedance
Operation :	Zoom :	Motorized(DC+/-6.4V, Max40mA) Speed Approx. 6.5sec.
	Focus :	Motorized(DC+/-6.4V, Max40mA) Speed Approx. 6.5sec.
	Iris :	EE (DC+8.5 to 16V : Fixed Voltage, Max50mA) Speed Within 4sec.(Auto Close System)
EE Mechanism :		The built-in EE Amp amplifies the difference between the video signal from the camera and the Iris signal level.
EE Accuracy :		With Input Video Signal 0.7Vp-p Within+/-10% of Mean Value
Operation Temperature :		-10 to +50
Mount :		CS-Mount(Adjustable Lens Position)
Front Thread :		43mm P0.75
Size, Weight :		70X65X104.3mm, Approx. 285g

[COMPOSITION]

Lens 1
Lens Cap 1
Dust Cap 1
VR Adjust Tool 1

4-Conductor Connector(Female) 1
(Any 4-conductor cable of external dia 6mm to be prepared separately.)

[DIMENSIONS]

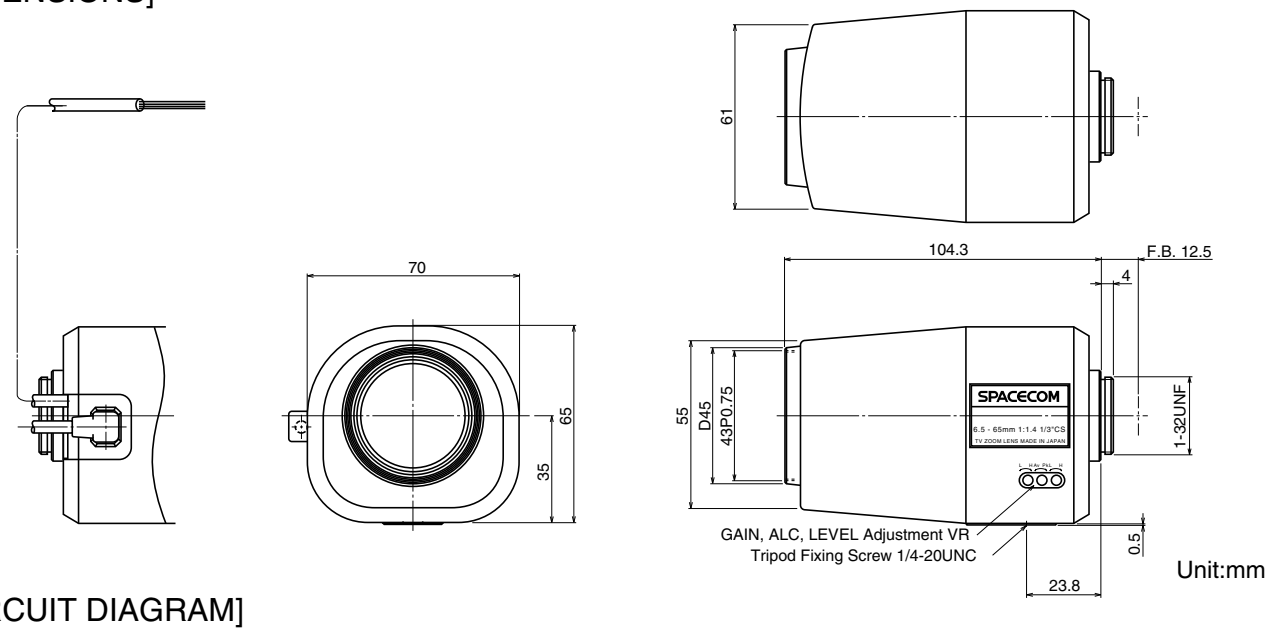

Unit:mm

[CIRCUIT DIAGRAM]

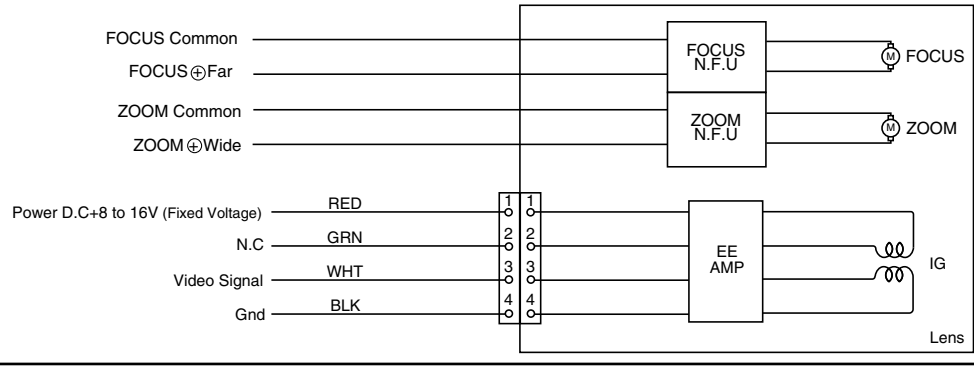

SUBJECT TO CHANGE WITHOUT NOTICE.