

【 SPECIFICATIONS】 Super-telephoto Motorized Zoom Lens W/POT


Image Size $\frac{1}{2}$ $\frac{1}{3}$ $\frac{1}{4}$

Focal Length:	20-700mm	Photometry Range:	Apporox. 40-70%/p-p
Max.Relative Aperture:	1:3.0 (Tele F9.0)	Input Impedance:	High Impedance
Iris:	F3.0~ 1,000(with ND spot filter)	Operation: Zoom:	Motorized(DC6-12V, Max.60mA)
Zoom Ratio:	35x	Focus:	Motorized(DC6-12V, Max.60mA)
Sensitivity Adjustment:	0.5~ 1.0Vp-p(Video Signal)	Iris:	E.E. (DC+8.5-16V(Fixed Voltage Max.60mA)
Angular Field of View:	17.66° x 13.24° at 20mm 0.53° x 0.4° at 700mm	EE Mechanism:	The built-in EE Amp. amplifies the difference between the video signal from the camera and the preset Iris signal level. It causes the Iris to change size.
Image Format:	6.4x 4.8mm(8mm)	EE Accuracy:	With Input Video Signal 0.7Vp-p Within+/-15% of mean value
Minimum Object Distance:	3.0m(From Front Vertex)	Operation Temperature:	-10 to +50
Object Dimensions at MD:	890 x 667 mm at 20mm 26.6 x 20 mm at 700mm	Mbunt:	C-Mbunt(Adjustable Lens Position)
Back Focus:	8.26mm(In Air)	Front Thread:	88mm P1.0
Flange Back:	17.526mm(In Air)	Size,Weight	2.0Kg
Input Signal:	Composite Video Signal or Video Signal		

【 Composition】

- Lens 1
- Front Cap 1
- Rear Cap 1

【 Dimensions】

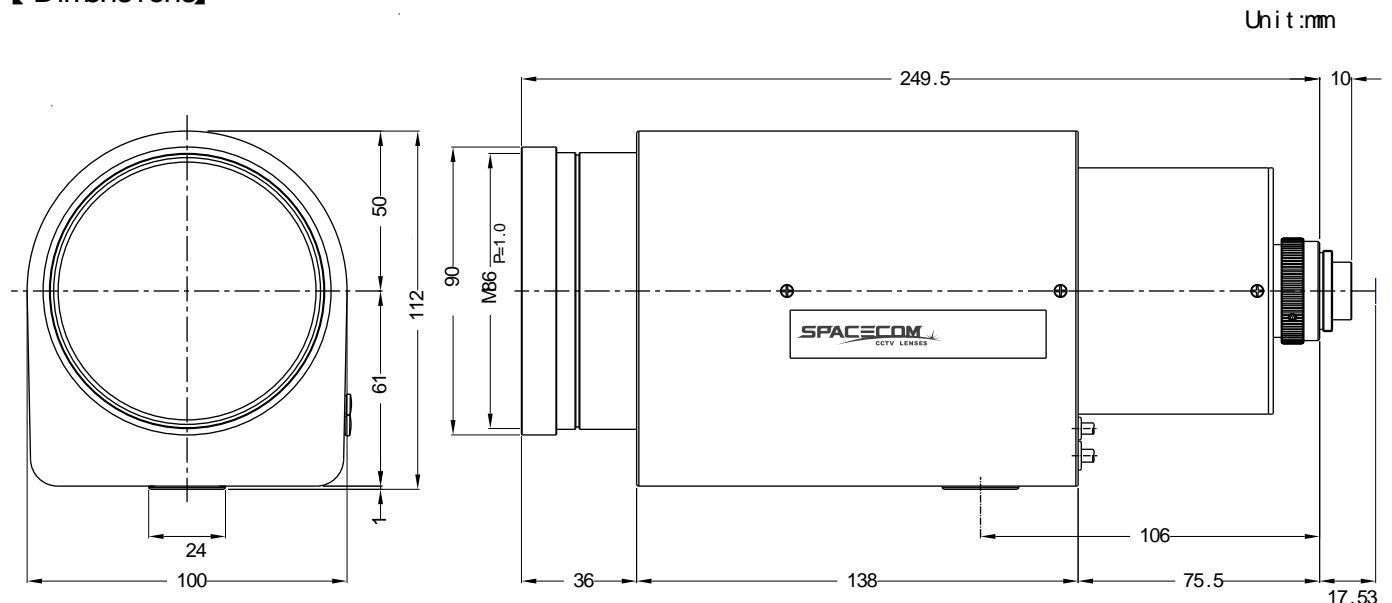

【 Wiring】

